

EXCLUSIVELY FROM




# The 3300-A Conveyorized Automatic with Patented A-Arm Technology

**FULLY AUTOMATIC:** can be designed to operate off-line with forklifts or in-line with a palletizer or existing conveyors

**SIMPLE:** The A-Arm technology eliminates the maintenance problems of a film clamp and hot wire cutting device

**ALL ELECTRIC:** no air requirement or noisy compressors

**AFFORDABLE:** fits any budget

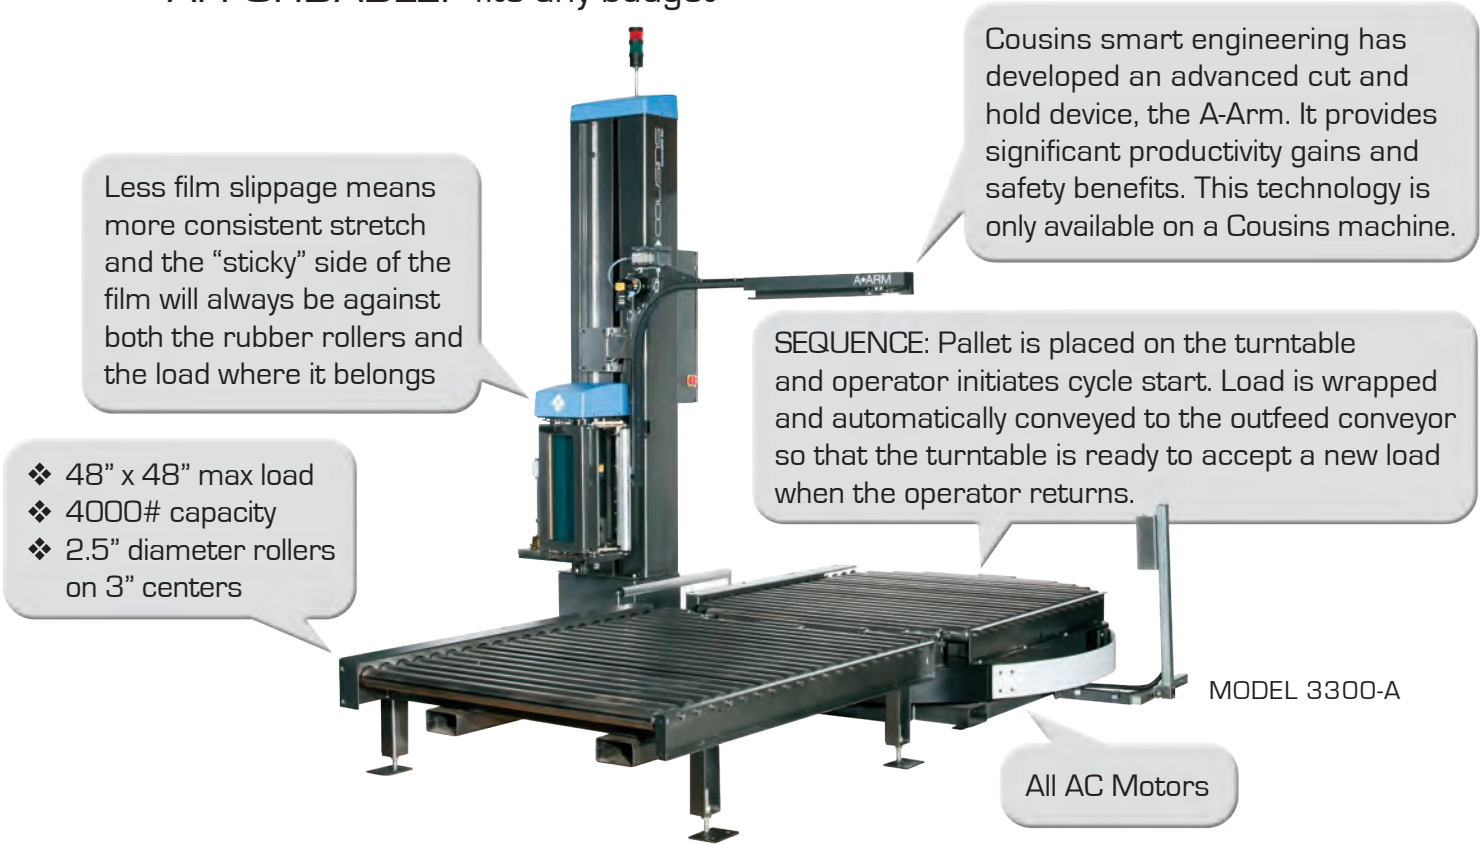

The 3300-A can be designed to fit into any convenient configuration to meet your floor plan requirement.



MODEL 3300-A



# 3300-A DESIGN FEATURES/SPECIFICATIONS

## CONTROLS:

- ❖ **PANASONIC** PLC with Touchscreen Operator Interface
- ❖ Power Off - On - Reset switch & Power On indicator light
- ❖ Film tension (Force-to-Load) control
- ❖ Separate film carriage raise & lower speed controls
- ❖ Broken film/out of film detection c/w automatic machine reset
- ❖ Stack-light beacon indicates run, clear or fault conditions
- ❖ Pendant start/stop push-button station for remote operator control
- ❖ 115 Volts 1 Phase 60 Hz 20 Amps
- ❖ **3 Year Warranty on Components**



## FILM CARRIAGE:

- ❖ Super Rapid Thread II™ 20" capacity pre-stretch film carriage
- ❖ Safety Door with auto power cut-off switch
- ❖ Special Film Threading Device - Uniquely orientates the sticky side of the film against the pre-stretch rollers and the inside on the load.
- ❖ 1/2 HP AC variable speed motor
- ❖ 33% to 313% fixed stretch capability
- ❖ Carriage Descent Safety Shut-Off Device
- ❖ Superior film-to-roller contact area
- ❖ **Lifetime warranty on pre-stretch rollers**



## TURNTABLE:

- ❖ 72" diameter 3/8" thick laser-cut steel plate with 5" skirt
- ❖ Front and side cut-outs with UHMW flexible contouring for fork truck access
- ❖ 6-point heavy duty ball bearing caster support system
- ❖ 3-16 RPM rotational speed c/w soft start acceleration
- ❖ 3/4 HP AC variable speed motor c/w turntable holding brake
- ❖ Final revolution deceleration and positive stop alignment

## TOWER DESIGN:

- ❖ Fully Enclosed & Guarded Motors - no exposed cables
- ❖ Heavy Duty Formed/Structural Steel
- ❖ Electro-static powder coated paint finish
- ❖ **5 Year Warranty on Steel Fabrications**

## LOAD CAPACITY:

- ❖ 4000# Capacity
- ❖ 48" L x 48" W x 80" H max load size (24" minimum height)
- ❖ NOTE: Larger load size options are available

## CONVEYORS:

- ❖ 2.5" diameter rollers on 3" centers - 50" ERW
- ❖ Standard system includes 5" gravity outfeed conveyor with tapered end-stop & "FULL" photo-eye/logic

