

L-SEALERS PROFESSIONAL SERIES

MODELS

EM2016T(K), EM2028T(K), EM2040T(K), EM2050T(K), EM2070TK, EM2080TK, EM20100TK, EM3040T(K), EM3050T(K), EM3070TK, EM3080TK, EM30100TK, EM4040T(K), EM4050T(K), EM4070TK, EM4080TK, EM40100TK, EM5050TK, EM5070TK, EM5080TK, EM50100TK

DURABILITY THAT CAN'T BE MATCHED

EASTEY's Professional Series L-Sealers provide top of the line features and the most robust L-Sealer design on the market today. Expertly welded from ½" cold rolled steel, EASTEY Professional L-Sealers will withstand even the most abusive real world sealing applications. As a measure of strength, EASTEY L-Sealers weigh nearly twice as much as competitive models.

PROVEN RELIABILITY FOR YOUR NEEDS

Eastey L-Sealers are designed and built to give you all the performance features needed for positive sealing a wide variety of films including polyolefin, polyethylene, and PVC. Cast seal arms, stainless steel film clamps, and heavy duty dual magnet clamping are just some of the features that provide the durability you have come to rely on from EASTEY. See for yourself why EASTEY has been a leader in the shrink packaging industry for over 25 years.

EVERLASTING SEMI-AUTOMATIC L-SEALING

EASTEY Professional Series L-Sealers are the ultimate workhorse for your most abusive sealing applications.

STANDARD FEATURES

- Designed to seal most polyolefin, polyethylene, and PVC* shrink films
- All-welded main frame from ½" cold rolled steel
- Built-in drawer for tools or spare parts
- Seal head casting equipped with head return cylinder
- Stainless steel film clamps hold film in place while sealing
- Available with hot wire or hot knife seal systems
- Hot knife seal systems available with mushroom (standard), pancake, arrow, or poly inserts
- Dual locking magnet clamps apply even pressure across sealbar
- Adjustable dwell time for better seal control
- Solid state temperature control adjustable for a variety of films*
- Adjustable product tray accommodates wide variety of product sizes
- Takeaway conveyor can be raised or lowered to center-seal product
- Automatic takeaway conveyor
- Heavy duty film cradle allows for easy changeovers and adjustments
- Adjustable pin perforator provides air evacuation
- Side seal size from 20" 50": front seal size from 16" 100"
- Maximum film width up to 44"
- Maximum film roll OD up to 12"; 10" with power unwind
- Custom two-part epoxy finish resists scratching
- Heavy duty casters for transportation within plant
- Available in 110v, 220v, or optional 480v
- Easy to use design requires minimal training and maintenance
- Made in the USA

* With Hot knife systems only



PROFESSIONAL SERIES

MODEL NUMBER	SEAL DIM	IENSIONS	MACHINE DIMENSIONS			STANDARD POWER				
	FRONT	SIDE	WIDTH	HEIGHT	LENGTH	VOLTS	AMPS	PHASE	WEIGHT	SHP WT.
EM2016T(K)	16"	20"	34"	44"	63"	220/110	10/20	1	600 lbs	700 lbs
	41 cm	51 cm	86 cm	112 cm	160 cm				272 kg	317 kg
EM2028T(K)	28"	20"	34"	44"	84"	220/110	10/20	1	700 lbs	800 lbs
	71 cm	51 cm	86 cm	112 cm	213 cm				317 kg	362 kg
EM2040T(K)	40"	20"	34"	44"	106"	220	15	1	800 lbs	900 lbs
	102 cm	51 cm	86 cm	112 cm	269 cm				362 kg	408 kg
EM2050T(K)	50"	20"	34"	44"	126"	220	20	1	900 lbs	1000 lbs
	127 cm	51 cm	86 cm	112 cm	320 cm				408 kg	453 kg
EM2070TK	70"	20"	34"	44"	167"	220	25	1	1300 lbs	1400 lbs
	178 cm	51 cm	86.36	112 cm	424 cm				589 kg	635 kg
EM2080TK	80"	20"	34"	44"	187"	220	20	1	1500 lbs	1600 lbs
	203 cm	50 cm	86 cm	112 cm	474 cm				680 kg	725 kg
EM20100TK	100"	20"	34"	44"	227"	220	20	1	1900 lbs	2000 lbs
	254 cm	50 cm	86 cm	112 cm	577 cm				861 kg	907 kg
EM3040T(K)	40"	30"	43"	44"	106"	220	20	1	1200 lbs	1300 lbs
	101.60	76.20	109 cm	112 cm	269 cm				544 kg	591 kg
EM3050T(K)	50"	30"	43"	44"	126"	220	20	1	1300 lbs	1400 lbs
	127 cm	76 cm	109 cm	112 cm	320.04				591 kg	637 kg
EM3070TK	70"	30"	43"	44"	167"	220	25	1	1600 lbs	1700 lbs
	177 cm	76 cm	109 cm	112 cm	424 cm				728 kg	774 kg
EM3080TK	80"	30"	43"	44"	187"	220	25	1	1800 lbs	1900 lbs
	203 cm	76 cm	109 cm	112 cm	474 cm				819 kg	861 kg
EM30100TK	100"	30"	43"	44"	227"	220	25	1	2100 lbs	2200 lbs
	254 cm	76 cm	109 cm	112 cm	577 cm				956 kg	997 kg
EM4040T(K)*	40"	40"	53"	44"	106"	220	20	1	1700 lbs	1800 lbs
	101 cm	101 cm	135 cm	112 cm	269 cm				774 kg	819 kg
EM4050T(K)*	50"	40"	53"	44"	126"	220	20	1	1900 lbs	2000 lbs
	127 cm	101 cm	135 cm	112 cm	320 cm				861 kg	907 kg
EM4070TK*	70"	40"	53"	44"	167"	220	25	1	2100 lbs	2200 lbs
	177 cm	101 cm	135 cm	112 cm	424 cm				956 kg	997 kg
EM4080TK*	80"	40"	53"	44"	187"	220	25	1	2300 lbs	2400 lbs
	203 cm	101 cm	135 cm	112 cm	474 cm				1043 kg	1092 kg
EM40100TK*	100"	40"	53"	44"	227"	220	25	1	2600 lbs	2700 lbs
	254 cm	101 cm	135 cm	112 cm	577 cm				1179 kg	1229 kg
EM5050TK*	50"	50"	63"	44"	126"	220	20	1	1900 lbs	2000 lbs
	127 cm	127 cm	160 cm	112 cm	320 cm				861 kg	907 kg
EM5070TK*	70"	50"	63"	44"	167"	220	25	1	2100 lbs	2200 lbs
	177 cm	127 cm	160 cm	112 cm	424 cm				956 kg	997 kg
EM5080TK*	80"	50"	63"	44"	187"	220	25	1	2300 lbs	2400 lbs
	203 cm	127 cm	160 cm	112 cm	474 cm				1043 kg	1092 kg
EM50100TK*	100	50"	63"	44"	227"	220	25 * D	1 Powered	2600 lbs	2700 lbs
	254.00	127 cm	160 cm	112 cm	577 cm				1179 kg	1229 kg
		l .								



* Powered film unwind included

7041 Boone Avenue North, Brooklyn Park, MN 55428 (763) 428-4846 1 (800) 835-9344 fax (763) 795-8867

www.eastey.com info@eastey.com



L-SEALERS PROFESSIONAL SERIES

STANDARD FEATURES



















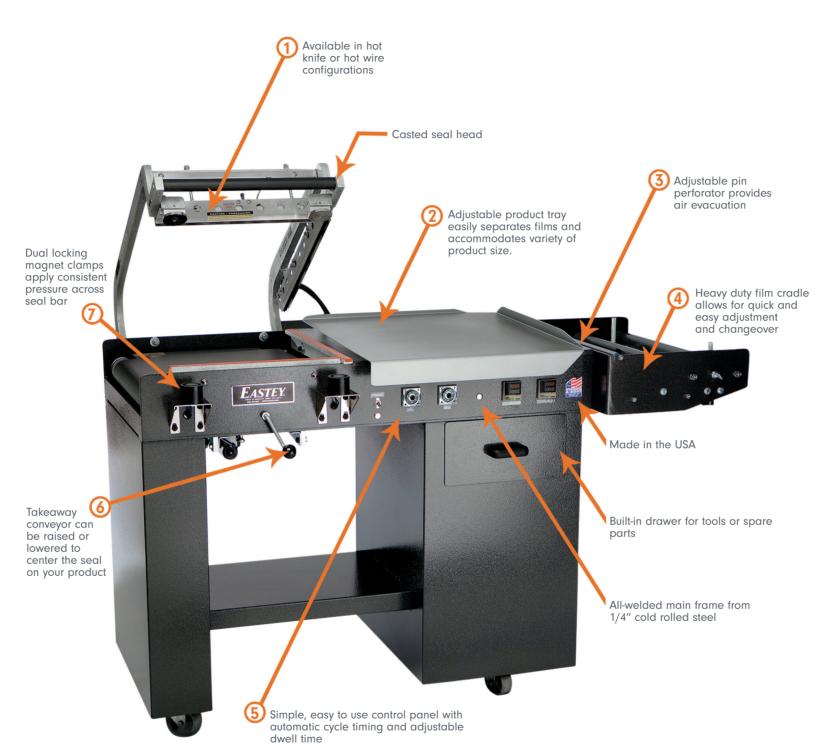

OPTIONAL ACCESSORIES









A Power film unwind

Allows free feeding of film increasing operator efficiency.

B Film Inverter

Inverting head allows the film to come off the back of machine. This pre-opens the film and minimizes operator effort which in turn increases output.

C Hot Knife Inserts

Hot knife inserts available in Mushroom, Pancake, Poly, or Arrow styles.

- D Stainless Steel and Left Hand Models Available
- E DuoSeal Continuously Heated Seal Bar
- F Lower Conveyor
- **G Customer Product Guides and/or Product Tray**



